




## Technical Data – HB938A

### Product description

- Copper foil conductive adhesive tape
- Heat / Cold resistant
- Good conductive properties

### Construction

- Copper Foil (38µm/.001in)
- Conductive Acrylic Adhesive
- Release liner

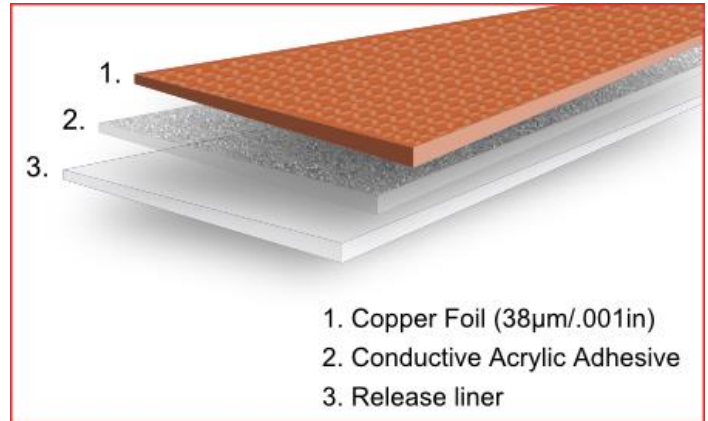

1. Copper Foil (38µm/.001in)  
2. Conductive Acrylic Adhesive  
3. Release liner

### Technical data

Item	Unit		Spec.	
Total thickness	µm	Inch	95µm	.004
Peel Strength	g/inch	lb/inch	900	1.98
Temperature Resistance	°C	°F	130	266
Electrical Resistance	Ω	-	0.5	-
Elongation	%	-	8	-

### Application

1. Shielding of signal cable
2. Repair for shielding signal cable or FCC
3. Blinding the end of knitted wire mesh of shielding cable
4. For shield leaking or invading electromagnetic waves
5. Tape for EMR / RFI shielding

### Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.



### High Performance Tapes and Adhesive Products

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS  
Telephone: +44 (0)1536 260022 Fax: +44 (0)1536 260044  
email: sales@hi-bondtapes.co.uk  
www.hi-bondtapes.com

Company Registration No. 3985595



MEMBER  
GERMAN-BRITISH  
CHAMBER OF INDUSTRY & COMMERCE