

Technical Data – HBA600WP


Product description

- designed for WPC Wireless Power Charge
- the magnetic sheet improves wireless charging efficiency to 65% with electro-magnetic induction on the receiver and the item being charged

Construction

- Absorbing material
- Adhesive coating
- Paper liner

Technical data

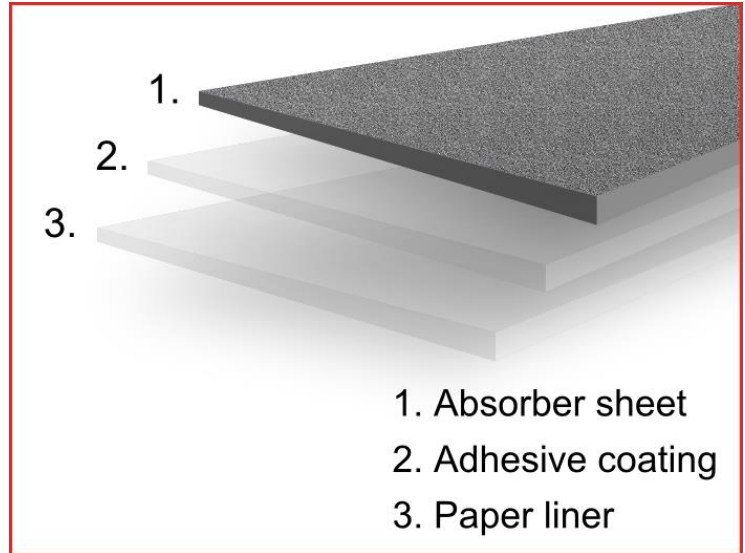

Item	Unit		Spec.		Test method
Standard thickness	µm	inch	250	0.001	-
Permability (at 1 MHz)	µ'	-	48	-	-
Temperature range	°C	°F	-25~125	-13~257	-
Specific gravity	g/cm ³	-	3.7 ± 0.3	-	-
Tensile strength	kg/cm ²	lb/inch	>100	>645.16	-
Surface Electrical resistance (min)	Ω	-	1 x 10 ⁸	-	-
Thermal Conductivity	W/m-K	-	0.8±0.1	-	-
Elongation	%	-	≥60	-	-
Environment	RoHS Compliant, Halogen Free				

Application

Wireless power charging.

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.



High Performance Tapes and Adhesive Products

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS
 Telephone: +44 (0)1536 260022 Fax: +44 (0)1536 260044
 email: sales@hi-bondtapes.co.uk
 www.hi-bondtapes.com

Company Registration No. 3985595

