


Technical Data – CD405CP

Product description

- Premium quality transparent protection film
- Anti-scratch
- High grade silicone adhesive for clean removal

Construction

- 3H hard-coated layer
- Chlorinated PP film (40µm)
- Silicone PSA adhesive (15µm)
- Liner

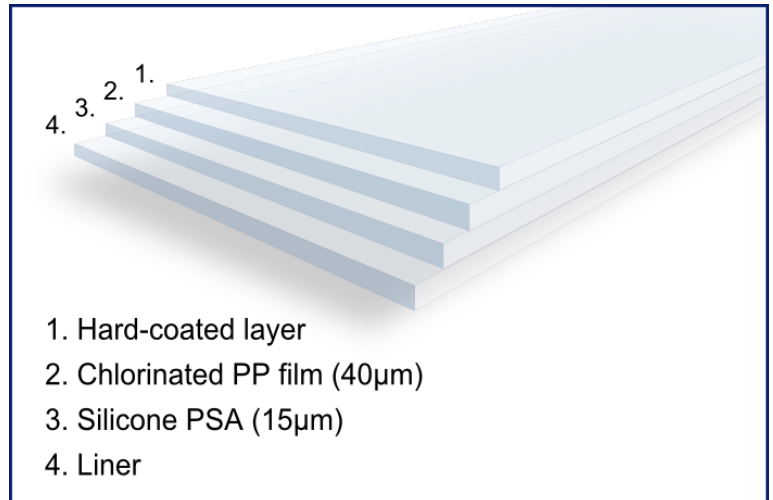

Technical data

Item	Unit		Spec.		Test method
Base thickness	µm	Inch	40	0.0016	ASTM D3652
Total thickness	µm	Inch	55	0.0022	ASTM D3652
Peel Strength	Gf-50mm	ozf-in	3	0.008	ASTM D3330
Elongation at break	%	-	600	-	ASTM D3759
Tensile strength	kg/25mm	lb/inch	>6	>13	ASTM D3759
Hardness	-		3H	-	-

Application

1. Protection in manufacturing processes and for shipping
2. For use on glass, PMMA and PC

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.

Quality Protection Films for Mobile Devices

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS

Telephone: +44 (0)1536 260660 Fax: +44 (0)1536 260044

email: sales@clear-diamond.co.uk

www.clear-diamond.com

Company Registration No. 3985595



MEMBER
GERMAN-BRITISH
CHAMBER OF INDUSTRY & COMMERCE