


Technical Data – CD670PO

Product description

- Premium quality transparent protection film
- Soft and comfortable for curved surfaces
- High grade silicone adhesive for clean removal
- Works within a wide range of temperatures

Construction

- PO film (60µm)
- Silicone PSA

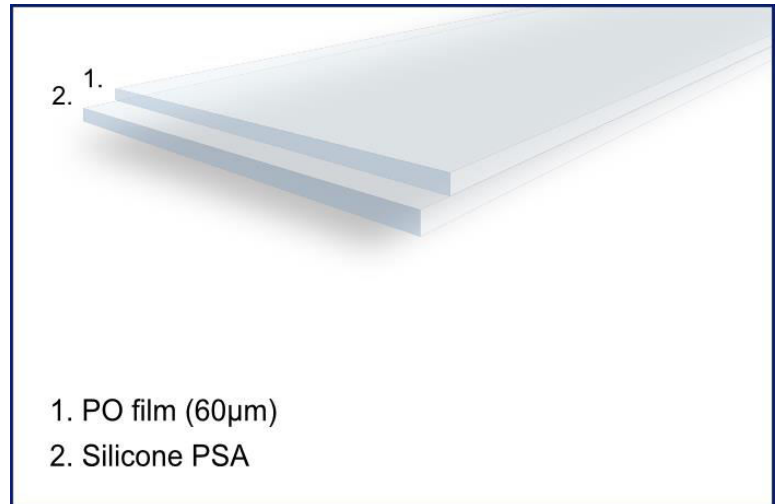

Technical data

Item	Unit		Spec.		Test method
Base thickness	µm	Inch	60	0.0024	ASTM D3652
Total thickness	µm	Inch	70	0.0028	ASTM D3652
Peel Strength	Gf-50mm	ozf-in	50	0.139	ASTM D3330
Elongation at break	%	-	500	-	ASTM D3759
Tensile strength	kg/25mm	lb/inch	>7	>15	ASTM D3759

Application

1. Protection in manufacturing processes and shipping
2. For use on glass, PMMA and PC

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.

Quality Protection Films for Mobile Devices

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS
Telephone: +44 (0)1536 260660 Fax: +44 (0)1536 260044

email: sales@clear-diamond.co.uk
www.clear-diamond.com

Company Registration No. 3985595



MEMBER
GERMAN-BRITISH
CHAMBER OF INDUSTRY & COMMERCE