




## Technical Data – HB215

### Product description

- Double sided tissue tape
- Colour: Clear

### Construction

- 155 to 165 µm PE coated paper liner
- Acrylic adhesive
- 30µm tissue
- Acrylic adhesive

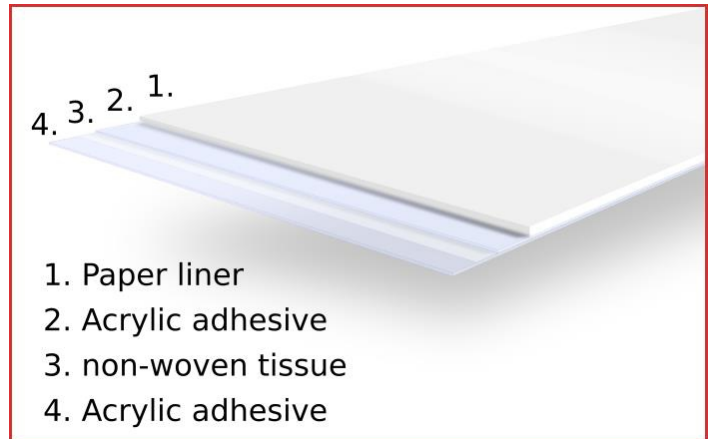

### Technical data

Item	Unit		Spec.		Test method
Carrier Thickness	µm	in	30	.0012	-
Overall Thickness	µm	in	145±10	.0057	-
Adhesive strength	gf/25mm	lbf/in	2000	4.4	PSTC-1
Initial Tack (A/B side)	cm	in	< 5	< 2	PSTC-6 (#14 BALL)
Elongation	%	-	3±1	-	-
Temperature resistance (short term)	°C	°F	180	356	-
Temperature resistance (long term)	°C	°F	140	284	-
Low temperature resistance	°C	°F	-40	-40	-
UV resistance	-	-	GOOD	-	-

### Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.



### High Performance Tapes and Adhesive Products

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS  
 Telephone: +44 (0)1536 260022 Fax: +44 (0)1536 260044

Email: sales@hi-bondtapes.co.uk  
 www.hi-bondtapes.com

Company Registration No. 3985595

