


Technical Data – HFL1200

Product description

- Flexible temperature resistant fine line masking tape especially developed for multi-colour paint applications of plastic parts such as bumpers
- Very thin, conforms to the dimensional changes during oven-drying and does not shrink or lift off.
- Does not leave residues after removal.
- The flexibility of the backing material allows good conformance to multi-dimensional services

Construction

- Green PVC Copolymer (110µm)
- Adhesive layer (25µm)

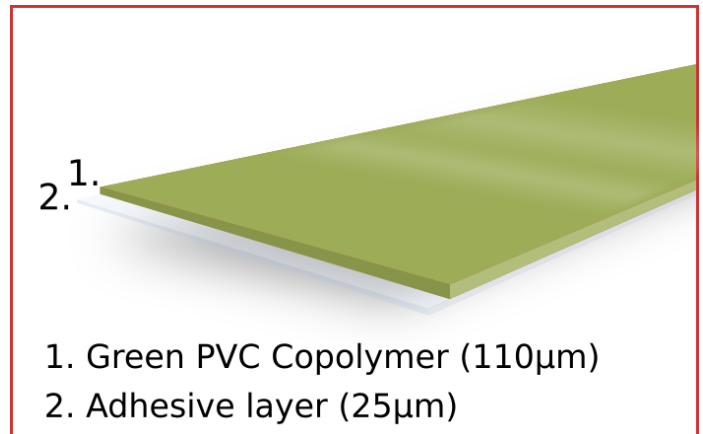

Technical data

Item	Unit		Spec.		Test method
Total thickness	µm	In	110	0.0043	-
Tensile strength	gf/25mm	lbf/in	6373.23	14.05	-
Adhesion to steel	gf/25mm	lbf/in	866.76	1.91	-
Elongation at break	%	-	248	-	-
Temperature Resistance <small>(Short term)</small>	°C	°F	150	302	-

Applications

1. Multi-colour paint applications
2. Plastic parts (bumpers....)
3. Not recommended for long term outdoor use

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.



High Performance Tapes and Adhesive Products

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS

Telephone: +44 (0)1536 260022 Fax: +44 (0)1536 260044

Email: sales@hi-bondtapes.co.uk

www.hi-bondtapes.com

Company Registration No. 3985595

