


## Technical Data – HPS ST500

### Medium Silicone Foam.

#### Applications:

- Environmental seals to protect against penetration of dust, moisture, air or light within outdoor enclosures such as lighting fixtures, HVAC units, and electronic cabinets.
- Vibration isolators in electronic components and transportation vehicles.
- Shock absorbing cushions and gaskets.

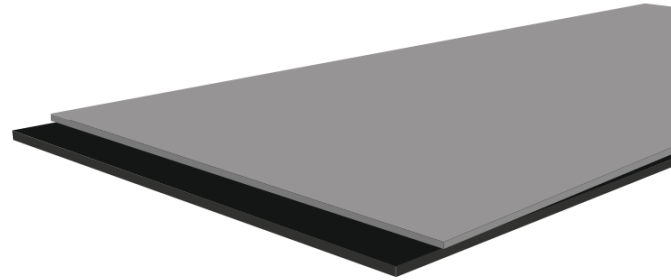

#### Technical Data:

Item	Unit	Value	Test method	
Colour	visual	BLACK/GREY	-	
Thickness	mm	1.5 ~ 10	-	
Density	g/cm <sup>3</sup>	0.45	-	
Tensile Strength	kPa	420	ASTM D412	
Compression Force Deflection	75%	kPa	170@25% deflection	ASTM D1056
Compression set ( @100°C/22hr)	% max	< 5 @ 100°C	ASTM D1056	
Thermal Conductivity	W/mk	0.12	ASTM E1530	
Dielectric Constant	-	1.6	ASTM D149	
Volume Resistivity	Ω-cm	10 <sup>13</sup>	ASTM D257	
Continuous use Temperature	°C	-55 ~ 200	-	
Flame Resistance	-	V-0	-	

**Note:** Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.



#### High Performance Tapes and Adhesive Products

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS  
 Telephone: +44 (0)1536 260022 Fax: +44 (0)1536 260044

email: sales@hi-bondtapes.co.uk  
 www.hi-bondtapes.com

Company Registration No. 3985595

