

Technical Data – HB050FR


Double Sided Flame Retardant Adhesive Tape

Product description

- Polyester film substrate for good transparency
- The adhesive exercises excellent bonding performance.
- Rework to various adherents.
- Halogen Free Environmentally-friendly.

Construction

- Polyester release film (23µm)
- Flame retardant Acrylic adhesive (19µm)
- Polyester release film (12µm)
- Flame retardant Acrylic adhesive (19µm)
- Polyester release film (50µm)

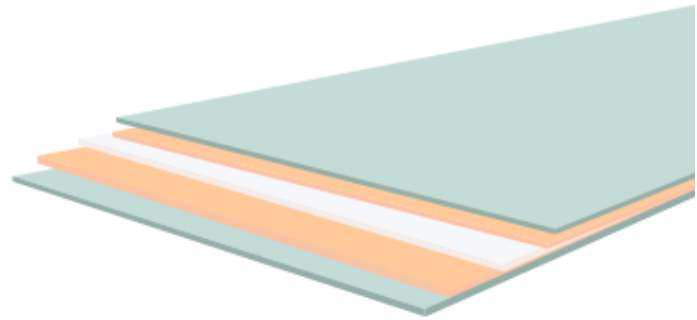

Technical data

Item	Unit		Spec.	Test method
Thickness		µm	50 ± 5	ASTM D3652
180° Peel adhesion (after 30min)	SUS304	gf/in	1050	ASTM D3330
Flame Retardancy	-	VTM	VTM-0	UL94-VTM

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.



High Performance Tapes and Adhesive Products

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS
 Telephone: +44 (0)1536 260022 Fax: +44 (0)1536 260044

email: sales@hi-bondtapes.co.uk
 www.hi-bondtapes.com

Company Registration No. 3985595

