Technical Data – HB241F

V2.0 10.07.18

Product description

- Double sided polyester tape
- Colour: Clear

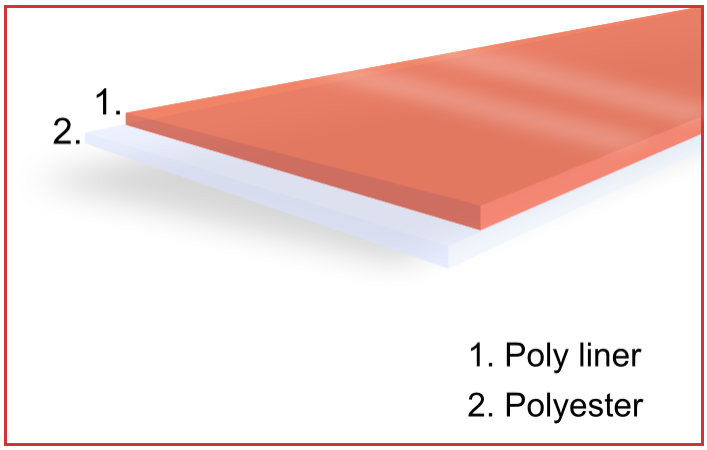

Construction

- Red MOPP liner
- Solvent acrylic adhesive

Technical data

Item	Unit		Spec.		Test method
Total Thickness	um		160± 5		AFERA 4006
Carrier	um		20 um PET		-
Liner type	um		80		-
Colour			Red		
Peel adhesion	g/25mm		2000	-	PSTC-1
Holding power (1.0kg/2.5cm *2.5cm)	hr		>24 hrs	-	PSTC-7
Holding power (0.5kg/2.5cm *2.5cm)	hr		>24 hrs	<2	PSTC-7
Holding power to temperature 60 °c	hr		>24 hrs		PSTC-7
Initial tack	cm		<5cm		PSTC-6 (#14 ball)
Temperature resistance			-40°c - +160°c		

Remarks

1. Testing conditions: Lab temperature 23±5°C; Lab humidity 55%±10% RH.
2. To be stored under constant temperature of 10~20°C; avoid exposing to high humidity.
3. Under normal condition, it can be stored for one year.

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.

High Performance Tapes and Adhesive Products

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS
Telephone: +44 (0)1536 260022 Fax: +44 (0)1536 260044
Email: sales@hi-bondtapes.co.uk
www.hi-bondtapes.com

Company Registration No. 3985595