


## Technical Data – HB880RT

### Product description

- Double sided closed cell polyethylene foam
- Good moisture and humidity resistance
- Clean removal (one side)

### Construction

- White paper liner (110µm)
- Acrylic adhesive
- White closed cell PE foam
- Permanent acrylic adhesive

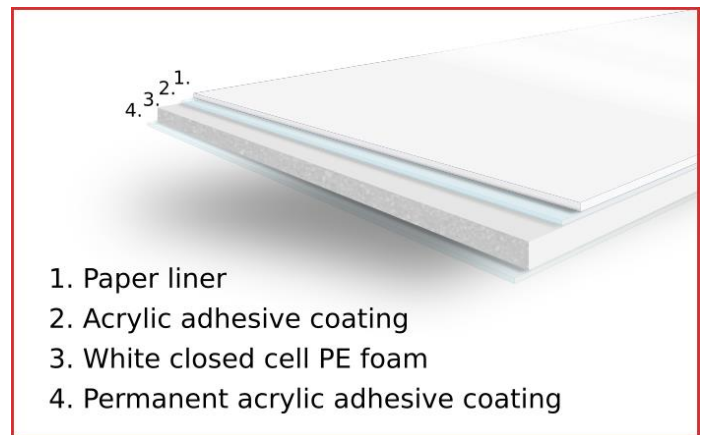

### Technical data

Item	Unit		Spec.		Test method
<b>Foam thickness</b>	mm	In	0.9 ± 0.1	.0354	-
<b>Adhesion</b> (Open Side A)	kg/25mm	lb/in	2	4.40	PSTC-1
<b>Adhesion</b> (Close side B)	kg/25mm	lb/in	0.3 - 0.6	0.66 - 1.32	PSTC-1
<b>Holding Power</b> (20°C, 1kg/in <sup>2</sup> )	h	-	>24	-	PSTC-7
<b>Holding Power</b> (60°C, 1kg/in <sup>2</sup> )	h	-	>24	-	PSTC-7
<b>Temperature resistance</b>	°C	°F	-20~120	-4~248	-

### Application

1. Temporary applications
2. Signs and display panels
3. Point of sale
4. Exhibitions
5. Temporary fixing to glass and clear plastics

### Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.

### High Performance Tapes and Adhesive Products

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS  
 Telephone: +44 (0)1536 260022 Fax: +44 (0)1536 260044

Email: sales@hi-bondtapes.co.uk  
 www.hi-bondtapes.com

Company Registration No. 3985595

