




Technical Data –VST6110W

Product description

- Foamed Acrylic Tape
- Colour: White

Construction

- Red PE Liner
- Acrylic adhesive

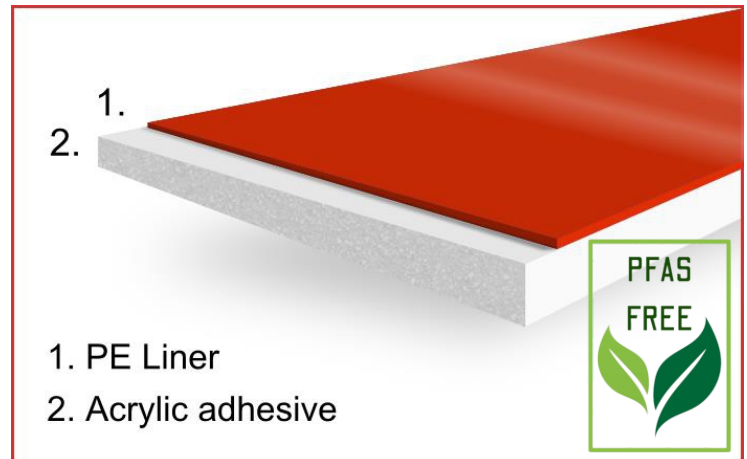

Technical data

Item	Unit		Spec.		Test method
Thickness	mm	in	1.1(±0.1)	0.043(±0.004)	-
Density	kg/m ³	lb/ft ³	780	49	-
180° Peel Strength	g/25mm	lb/in	3600	8.1	ASTM-D-3330 (Stainless steel, room temp)
Tensile Strength (T-Block Test)	g/cm ²	lb/in ²	6500	92	ASTM-D-897 (Aluminium, room temp)
Dynamic Shear (after 20 min)	g/cm ²	lb/in ²	4000	57	ASTM D-1002 (Stainless steel, room temp)
Dynamic Shear (after 24hrs)	g/cm ²	lb/in ²	5500	78	ASTM D-1002 (Stainless steel, room temp)
Temperature Resistance (Short Term)	°C	°F	160	320	-
Temperature Resistance (Long Term)	°C	°F	100	212	-
Low Temp. Resistance	°C	°F	-40	-40	-
UV Resistance	-	-	Good	-	-

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.



High Performance Tapes and Adhesive Products

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS
 Telephone: +44 (0)1536 260022 Fax: +44 (0)1536 260044
 email: sales@hi-bondtapes.co.uk
 www.hi-bondtapes.com

Company Registration No. 3985595

