

Technical Data – CD700H


V3.0 17.06.25

Product description

- Premium quality optically clear protection film
- Clear anti-scratch hard-coat
- High grade optically clear silicone adhesive which is clean removal

Construction

- Green PET overlay film (50µm)
- Clear Hard Coating / Hydrophobic finish (15µm)
- Optically clear protection film (75µm)
- Optically Clear Silicone adhesive, clean removable (30µm)
- White polyester release film (50µm)

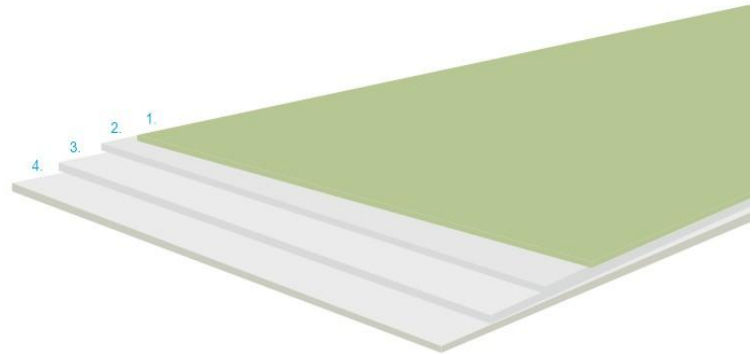

Technical data

Item	Spec.		Test method
Appearance	-	Transparent	Visual Test
Total thickness	µm	145 except release liner	-
Durability	g/25mm	Good	Company Method
Transmissivity	%	> 90	ASTM D1003
Haze	kg/cm	< 1	ASTM D1003
Hardness	H	≥ 7	Pencil Test
Adhesive	-	Silicone	-
Peel Strength	gf/inch	15 + / - 5 g/f	ASTM D6001

Application

1. Protection for the aftercare market for Smartphones and all touch screens and displays.
2. For use on glass, PMMA and Polycarbonate screens.
3. Goggles and visors.

Note: Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.